


NOTES:


1. ALL CONCRETE TO BE CLASS "B", MAG SECTION 725.
2. ALL RAMP AND DETECTABLE WARNING SHALL BE ALIGNED IN THE DIRECTION OF PEDESTRIAN TRAVEL AND DIRECTED TOWARD RAMP ON THE OPPOSITE SIDE OF STREET.
3. SEE PLANS FOR LOCATION OF SIDEWALK RAMP CENTERLINE.

LEGEND

- 12:1 MAXIMUM SLOPE,
15:1 DESIRED SLOPE
- 2% MAXIMUM SLOPE,
1.5% MINIMUM SLOPE
- SIDEWALK RAMP PAYMENT
LIMITS AND HEAVY ROUGH
BROOM FINISH LIMITS

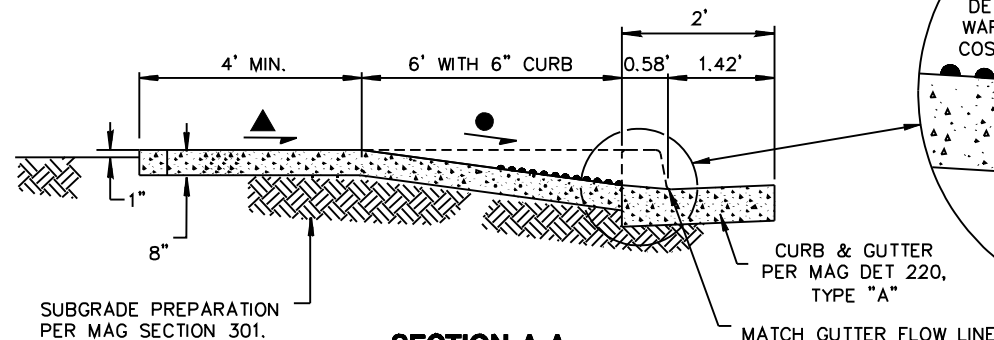

SECTION A-A

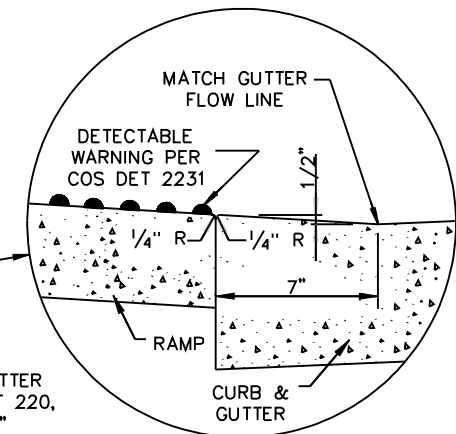

DETAIL 1